



Thruster Plume Plasma Diagnostics: A Ground Chamber Experiment for a 2-Kilowatt Arcjet

Joel T. Galofaro
Glenn Research Center, Cleveland, Ohio

Boris V. Vayner
Ohio Aerospace Institute, Brook Park, Ohio

G. Barry Hillard and Michael T. Chornak
Glenn Research Center, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



Thruster Plume Plasma Diagnostics: A Ground Chamber Experiment for a 2-Kilowatt Arcjet

Joel T. Galofaro
Glenn Research Center, Cleveland, Ohio

Boris V. Vayner
Ohio Aerospace Institute, Brook Park, Ohio

G. Barry Hillard and Michael T. Chornak
Glenn Research Center, Cleveland, Ohio

Prepared for the
Sixth Frontiers in Low-Temperature Plasma Diagnostics Workshop
sponsored by the Laboratoire de Spectrometrie Physique
Les Houches, France, April 17–21, 2005

National Aeronautics and
Space Administration

Glenn Research Center

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov>

Thruster Plume Plasma Diagnostics: A Ground Chamber Experiment for a 2-Kilowatt Arcjet

Joel T. Galofaro
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Boris V. Vayner
Ohio Aerospace Institute
Brook Park, Ohio 44142

G. Barry Hillard and Michael T. Chornak
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Although detailed near field (0 to 3 cm) information regarding the exhaust plume of a two kilowatt arc jet is available (refs. 1 to 6), there is virtually little or no information (outside of theoretical extrapolations) available concerning the far field (2.6 to 6.1 m). Furthermore real information about the plasma at distances between (3 to 6 m) is of critical importance to high technology satellite companies in understanding the effect of arc jet plume exhausts on space based power systems. It is therefore of utmost importance that one understands the exact nature of the interaction between the arc jet plume, the spacecraft power system and the surrounding electrical plasma environment. A good first step in understanding the nature of the interactions lies in making the needed plume parameter measurements in the far field. All diagnostic measurements are performed inside a large vacuum system (12 m diameter by 18 m high) with a full scale arc jet and solar array panel in the required flight configuration geometry. Thus, necessary information regarding the plume plasma parameters in the far field is obtained. Measurements of the floating potential, the plasma potential, the electron temperature, number density, density distribution, debye length, and plasma frequency are obtained at various locations about the array (at vertical distances from the arc jet nozzle: 2.6, 2.7, 2.8, 3.2, 3.6, 4.0, 4.9, 5.0, 5.4, 5.75, and 6.14 m). Plasma diagnostic parameters are measured for both the floating and grounded configurations of the arc jet anode and array. Spectroscopic optical measurements are then acquired in close proximity to the nozzle, and

contamination measurements are made in the vicinity of the array utilizing a mass spectrometer and two Quartz Crystal Microbalances (QCM's).

Introduction

The objective of the experiment is to obtain direct in-situ measurements of the arcjet exhaust plume characteristics by simulating the actual arcjet/solar array distance and geometry for satellites as they would be configured in orbit. Such plume characteristics are necessary to model the behavior of the solar panel immersed in the arcjet plume. Additionally, it was desired to determine whether tungsten ions from the arcjet cathode were present in any significant quantity in the arcjet plume. An attempt is made to detect the presence of tungsten ions using two QCM's, a mass spectrometer and optical spectroscopy techniques.

Experimental Setup

The arcjet experiment was performed in the B2 thermal chamber at the NASA Glenn Plum Brook Station located in Sandusky, Ohio. The B2 vacuum chamber is a world class facility (the largest facility of its kind in the world: 11.6 m diameter by 18.9 m high) capable of supporting full scale rocket engine thruster firings (sounding rockets, Delta III, and upper stage

rockets such as the Centaur booster) all in a safe vacuum environment. Additionally the B2 facility is designed to handle cryogenic and storable rocket propellants, rocket exhaust products, test article emissions, and pressurant venting. A multitude of existing engine and chamber support systems (low-pressure vents, water cooled steam ejectors, etc.) can be employed to provide airflows, evacuate gases, and support a wide variety of test hardware. The B2 chamber has a sustained pumping speed of 330,000 liters per second (via ten large diffusion pumps) and is capable of extended testing for space simulation.

A spectrometer and photodiode detector array is positioned behind the quartz window on the outside of the chamber. A matched set of 45° UV enhanced elliptical mirrors are used to direct light from the arcjet plume onto a 50 micron entrance slit thereby filling the spectrometer with light. The arcjet is positioned on the triangular test stand in the center of the bottom end of the chamber. The solar array height is raised between two interchangeable positions 2.1 m (near) and 4.3 m (far) using an electric motorized winch. The 3 m diagonal probe diagnostic rake is directly mounted to the array at a fixed distance 8 cm above the array surface. Diagnostics consist of five 11 mm diameter gold plated stainless steel spherical Langmuir probes, two cylindrical wire probes (0.003 mm diameter tungsten), two DC emissive probes for measuring plasma potential, a single Faraday cup for measuring ion temperature and ion distribution and an anodized aluminum plate. The probes are evenly spaced along the diagnostic rake with the Faraday cup located towards the lower right end of the diagnostic rack. A single 1.9 cm spherical Langmuir probe and a wire probe is located in close proximity to the chamber wall (50 cm height above the test stand) to check that the arcjet plume density is sufficiently low at the chamber wall.

For the experiment a base pressure of 10^{-6} Torr was attained before allowing the simulated hydrazine gas mixture to flow. (Chamber pressure is monitored using gas manometers and ionization gauge.) The arcjet simulated gas mixture is made up of hydrogen, nitrogen and ammonia (in a 2:1:0.3 mole fraction), with flow rates of 2mg/s for H_2 and 40mg/s or N_2 . A high impedance HV pulse is used to ignite the gas

mixture flowing over the arcjet's electrically heated tungsten cathode.

Experimental Results

Initial pumping of the B2 chamber commenced on August 31, 2004. Twenty four hours later hard vacuum was achieved. Background pressure was reduced to 9 μ Torr over a 72 hour period. On November 8th the first successfully firing of the arcjet occurred. The arcjet remained operational for about seven hours. In the early morning of November 10th the arcjet was operational once again. The arcjet remained operational through November 22, 2004. With the arcjet operating the arcjet gas mixture (hydrogen and nitrogen) remained stable in the (380 to 420 μ Torr range) (see fig. 1 for details).

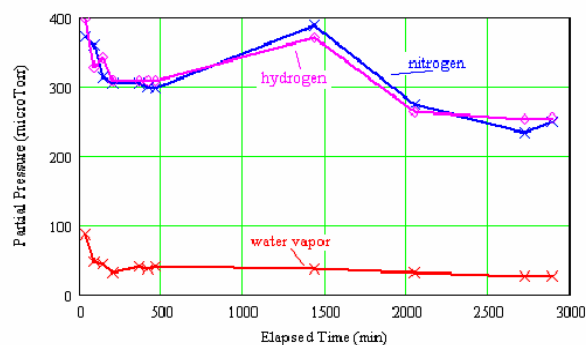


Figure 1.—A snapshot showing typical levels of residual gas with the arcjet operating on November 10, 2004.

The plasma parameters can be experimentally determined from the Langmuir probe volt/ampere characteristics or I-V curve. Typically the Langmuir probe is biased through a range of potentials (–30 to +30 V) and the current collected by the probe is measured with a very sensitive nano ammeter.

However the most commonly used methods for deducing the plasma parameters is not strictly applicable for this experiment because of the low density of the hydrogen plasma. In order to overcome the low hydrogen density problem a fitting formula with four adjustable parameters floating potential, (V_f), plasma potential (V_p), electron (T_e), and ion (T_i), temperatures) is used to circumnavigate the problem (fig. 2).

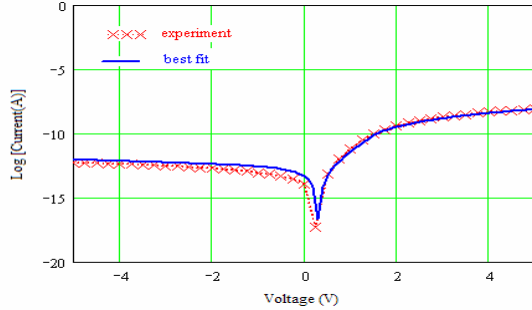


Figure 2.—Four adjustable parameters (V_f , V_p , T_e , and N_i) are used to fit experimental points to theoretical calculations.

Both the cylindrical wire probe and the spherical Langmuir probe I-V characteristics were used to determine the plasma parameters. Additionally emissive probes were used to experimentally measure plasma potential values.

Attempts to measure electron number densities by exciting plasma waves (by arcing the anodized plate) and finding the peaks of the spectra resulted in the following data: $N_e = (10.4 \pm 11) \times 10^6 \text{ cm}^{-3}$ for wire probe number 1 and in $N_e = (11.7 \pm 6.3) \times 10^6 \text{ cm}^{-3}$ for Langmuir probe number 4, which despite the large error bars, are in general agreement with other measurements taken in the top position of the array. A simple plot of the density data is shown in figure 3. Because of changing experimental conditions (grounding and floating array, biasing individual strings, applying voltage between strings) and because of the natural errors in determination of the plasma number density much scatter is present in the density plots shown in figure 3.

An attempt to improve on the density measurements was made on November 18 by sweeping all Langmuir probes with both the arcjet anode and array at the floating potential. Figure 4 shows a plot of the November 18th measurements. The best fit of electron number density data (using 5 spherical Langmuir probes) is also given in figure 4. A plot of the plasma potential, floating potential and electron number density in the chamber is plotted in figure 5. Note that the plasma and floating potentials appear to follow one another closely in figure 5. The electron temperatures (fig. 5) range between 0.09 and 0.15 eV. The attempt to determine electron temperature from the recombinational continuum results in the following number: $T_e = 0.28(\pm 0.02) \text{ eV}$. Due to a bad connection in the Faraday cup wires no ion temperature and distribution data is available.

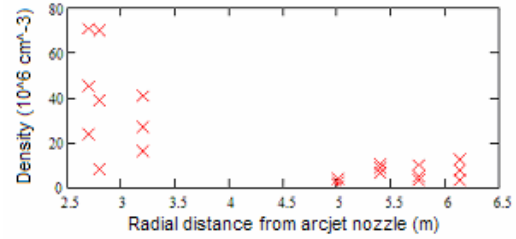


Figure 3.—Plot of density distribution data gathered between November 8–12, 2004.

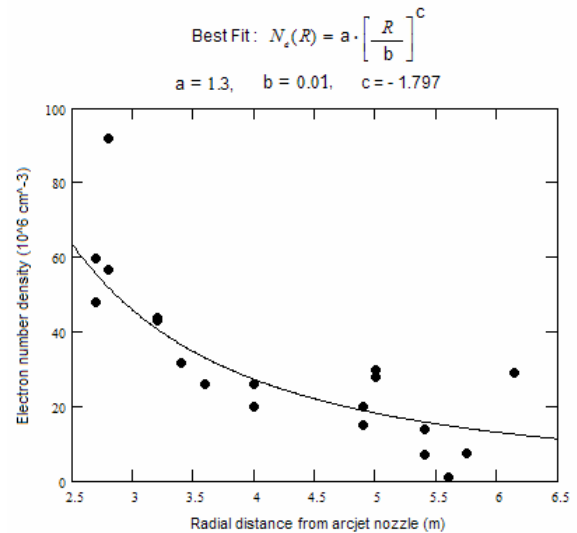


Figure 4.—Best data fit of number density taken November 18, 2004. The standard deviation, $\sigma = 0.364$.

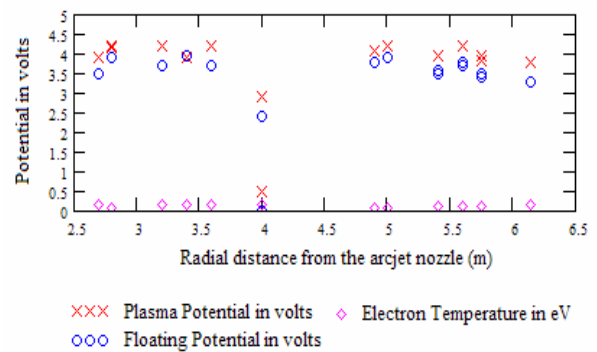


Figure 5.—Plots of electron temperature, plasma and floating potentials obtained November 18, 2004.

The QCM results showed little variation in either mass or frequency, all measurements lying well below the noise threshold of both detectors. As a result we

were unable to confirm the presence of tungsten ions, a fact that was also born out by the mass spectrometer results. A final attempt was made to confirm the presence of tungsten ions using the optical spectrometer with similar results. The entire optical spectrum was sweep (250 to 850 nm) with the central wavelength settings set in 50 nm increments. The optical spectrometer results are shown in figure 6.

Conclusions

Much important and valuable information about the arcjet plume is reported here. The plasma plume is characterized by low electron density ($1.0 \times 10^7 \text{ cm}^{-3}$ to $6.0 \times 10^7 \text{ cm}^{-3}$) cold plasma with electron temperatures ranging between 0.09 to 0.15 eV with mean value of 0.128 eV and a standard deviation, $\sigma = 0.026$. The plasma potentials for the most part ranged between 3.0 to 4.5 volts with floating potentials staying close ($\pm 0.5 \text{ V}$) to the plasma potential. The higher electron temperatures and number densities were found to be larger near the arcjet nozzle and smaller at the greater distances.

We were unable to detect the presence of tungsten ions (by a multitude of either QCM, mass or optical spectrometer measurements) However, an attempt was made to set an upper limit on the density of atomic tungsten. The most intensive spectral line of tungsten ($\lambda = 400.88 \text{ nm}$ in maximum transmission efficiency region of the photocathode detector) has an excited (ionized) state, $T_e = 3.4 \text{ eV}$, which corresponds to a transition probability equal to $1.63 \times 10^{-7} \text{ s}^{-1}$. Comparing the ratio (of the product of transmission probability and line intensity of tungsten with the measured spectral intensity results for hydrogen) an upper limit on the number density of atomic tungsten is estimated at $N_W^* \leq 0.03 \cdot N_H^* \text{ cm}^{-3}$. Furthermore the distance an excited tungsten atom can travel is about three times shorter than for hydrogen. As a result if tungsten is ionized by thermionic electrons near the arcjet cathode the number of atoms of tungsten reaching a region where the spectrum is observable must be negligible.

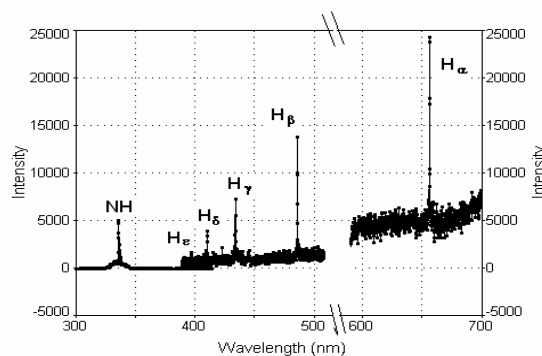


Figure 6.—The combined optical spectrum results in the range (250 to 800 nm).

References

1. Sankovic, J.M., and Jacobson, D.T. "Performance of a Miniaturized Arcjet," NASA TM 107062, 1995, pp. 17 (AIAA Paper 95-2822).
2. Zube, D.M., and Myers, R.M. "Thermal Nonequilibrium in a Low-Power Arcjet Nozzle," *Journal of Propulsion and Power*, vol. 9, no. 4, 1993, pp. 545-552.
3. Zube, D.M., Fye, D., Masuda, I., Gotoh, Y. "Low Bus Voltage Hydrazine Arcjet System for Geostationary Satellites," *Proceedings of 34th AIAA Joint Propulsion Conference*, July 13-15, 1998, Cleveland, OH, USA (AIAA Paper 983-631).
4. Crofton, M.W., Moore, T.A., Boyd, I.D., Masuda, I., and Gotoh, Y. "Near-Field Measurement and Modeling Results for Flight-Type Arcjet: NH Molecule," *Journal of Spacecraft and Rockets*, vol. 38, no. 1, 2001, pp. 79-86.
5. Crofton, M.W., Moore, T.A., Boyd, I.D., Masuda, I., and Gotoh, Y. "Near-Field Measurement and Modeling Results for Flight-Type Arcjet: Hydrogen Atom," *Journal of Spacecraft and Rockets*, vol. 38, no. 3, 2001, pp. 417-425.
6. Pollard, J.E., Masuda, I., and Gotoh, Y. "Plume Mass Spectrometry with Hydrazine Arcjet Thruster," *Journal of Spacecraft and Rockets*, vol. 38, no. 3, 2001, pp. 411-416.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE July 2005		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE Thruster Plume Plasma Diagnostics: A Ground Chamber Experiment for a 2-Kilowatt Arcjet			5. FUNDING NUMBERS WBS-22-612-50-81-07	
6. AUTHOR(S) Joel T. Galofaro, Boris V. Vayner, G. Barry Hillard, and Michael T. Chornak				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-15207	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2005-213837	
11. SUPPLEMENTARY NOTES Prepared for the Sixth Frontiers in Low-Temperature Plasma Diagnostics Workshop sponsored by the Laboratoire de Spectrometrie Physique, Les Houches, France, April 17-21, 2005. Joel T. Galofaro, G. Barry Hillard, and Michael T. Chornak, NASA Glenn Research Center; and Boris V. Vayner, Ohio Aerospace Institute, 22800 Cedar Point Road, Brook Park, Ohio 44142. Responsible person, Joel T. Galofaro, organization code RPV, 216-433-2294.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category: 18 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Although detailed near field (0 to 3 cm) information regarding the exhaust plume of a two-kilowatt arc jet is available, there is virtually little or no information (outside of theoretical extrapolations) available concerning the far field (2.6 to 6.1 m). Furthermore real information about the plasma at distances between (3 to 6 m) is of critical importance to high technology satellite companies in understanding the effect of arc jet plume exhausts on space based power systems. It is therefore of utmost importance that one understands the exact nature of the interaction between the arc jet plume, the spacecraft power system and the surrounding electrical plasma environment. A good first step in understanding the nature of the interactions lies in making the needed plume parameter measurements in the far field. All diagnostic measurements are performed inside a large vacuum system (12 m diameter by 18 m high) with a full scale arc jet and solar array panel in the required flight configuration geometry. Thus, necessary information regarding the plume plasma parameters in the far field is obtained. Measurements of the floating potential, the plasma potential, the electron temperature, number density, density distribution, debye length, and plasma frequency are obtained at various locations about the array (at vertical distances from the arc jet nozzle: 2.6, 2.7, 2.8, 3.2, 3.6, 4.0, 4.9, 5.0, 5.4, 5.75, and 6.14 m). Plasma diagnostic parameters are measured for both the floating and grounded configurations of the arc jet anode and array. Spectroscopic optical measurements are then acquired in close proximity to the nozzle, and contamination measurements are made in the vicinity of the array utilizing a mass spectrometer and two Quartz Crystal Microbalances (QCMs).				
14. SUBJECT TERMS Arc jet thruster testing; Plasma exhaust plume; Diagnostics; Ground chamber simulation			15. NUMBER OF PAGES 10	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	

